

TECHNICAL DATA SHEET

MACER 111 Metallic AF

Material profile

The main components are organic fibres with NBR Binder and steel wire reinforced.

Application

General purpose metallic grade suitable for medium pressure steam, water, oils, fuels and inert gases for low stress conditions.

Dimensions of the standard sheets : ± 10%
1500 x 1500, 1500 x 2000, 1500 x 4000 mm
Standard Thickness : 0.40 mm to 5.00 mm


Thickness Tolerance :
≤ 1.00 mm ± 0.10 mm , > 1.00 mm ± 10 % mm
combustion engines.

Surface finish : Grey Colour (other Colour on Customer requirement)

Specification Compliance : ASTM F 104 Line Call Out : F712232 E34 A9 B6 M9

Max. peak temperature : 250°C

Max. Operating pressure : 80 bar

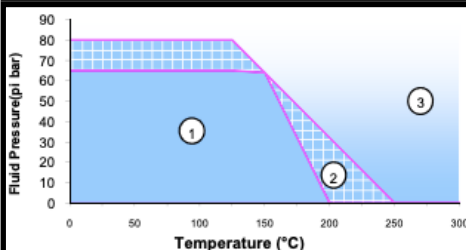

Areas of application

1. Suitable for the application, subject to chemical compatibility.
2. Only for short term temp. excursions
3. Do not install the gasket without technical assistance

Physical Properties (Properties applicable for 2.0mm thickness)

Properties	Test Method	Unit	Specified Value
1. Density	ASTM F 1315	g/cm ³	1.7 - 2.0
2. Compressibility	ASTM F 36 J	%	7 - 17
3. Recovery	ASTM F 36 J	%	≥ 40
4. Tensile Strength	ASTM F 152	N/mm ²	≥ 8
5. Creep Relaxation	ASTM F 38 B	%	≤ 40
6 Stress Relaxation (16h, 175°C)	DIN 52913		≥ 17
7. Gas Sealability	ASTM F 37B	ml/hour	< 1.0
8. ASTM Oil no. 3 (5h, 150°C)	ASTM F 146		
Thickness increase		%	≤ 15
Weight increase		%	≤ 20
ASTM Fuel B (5h, 23°C)	ASTM F 146		
Thickness increase		%	≤ 20
Weight increase		%	≤ 20
Water (5h, 100°C)	ASTM F 146		
Thickness increase		%	≤ 10
Weight increase		%	≤ 15

All information & recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide variety of possible installation & operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.